



绮丽龙  
**Cherrion**  
PVC商用卷材地板

**DajuLong**<sup>®</sup>  
大巨龙弹性地板



# Cherrion · Fabric

Dimension: 3.0m × 2.0m × 15m



JC-1803



JC-1806



JC-1802



JC-1804



JC-1808



JC-1801



JC-1805




JC-1807



# 绮丽龙·布纹


规格: 3.0mm × 2.0m × 15m

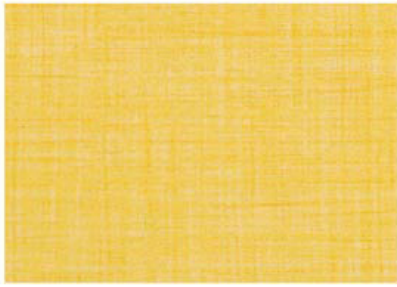

JC-1811




JC-1809

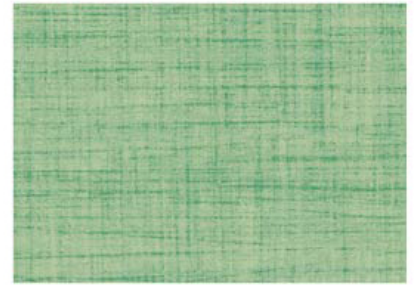

JC-1810



JC-1813

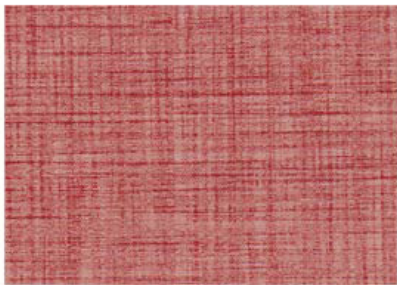

JC-1815



JC-1812



JC-1814




JC-1816



# Cherrion - Rock

Dimension: 3.0mm x 2.0m x 15m

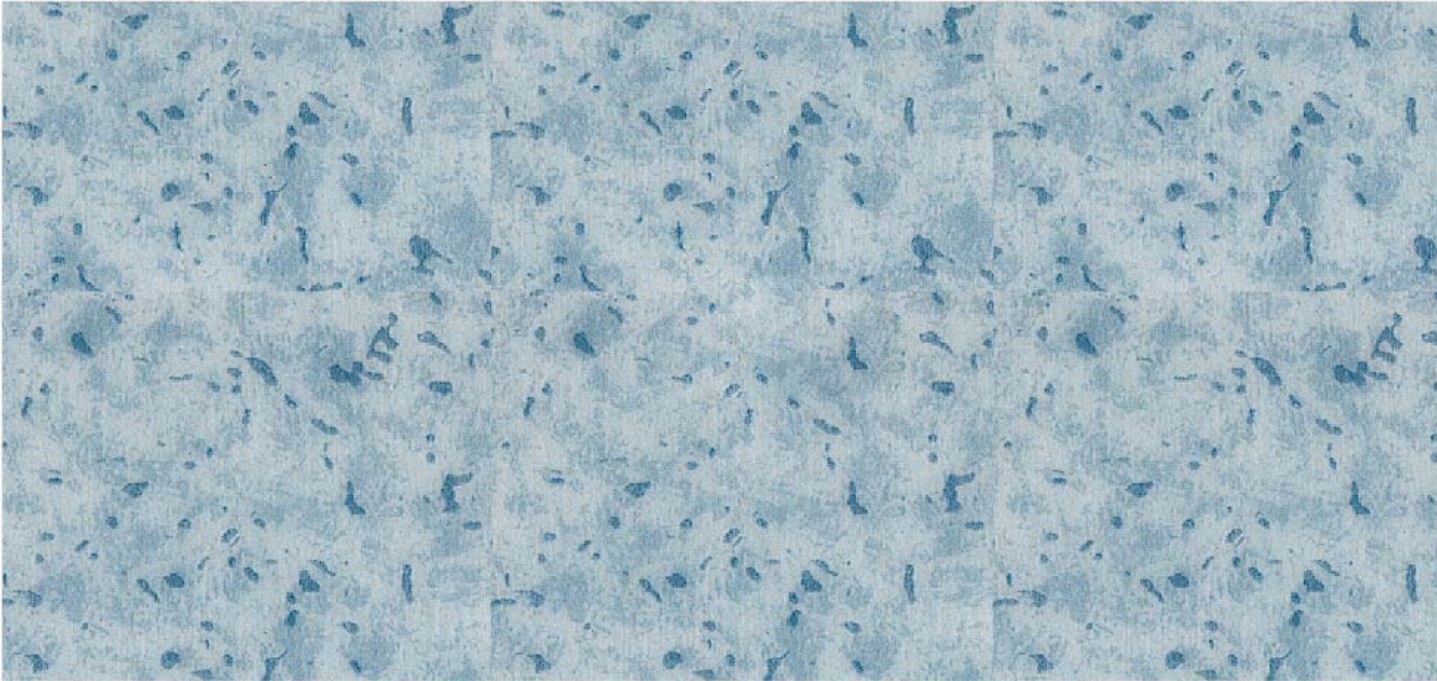


JC-631




JC-601



JC-602

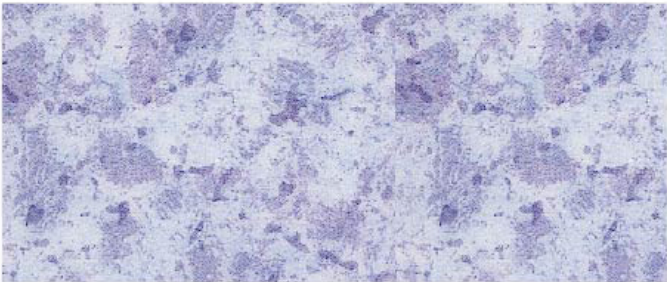

JC-611

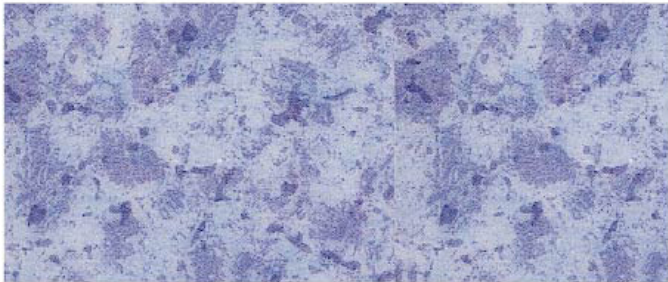

JC-612



JC-621




JC-622



# 绮丽龙·木纹

规格: 3.0mm × 2.0m × 15m

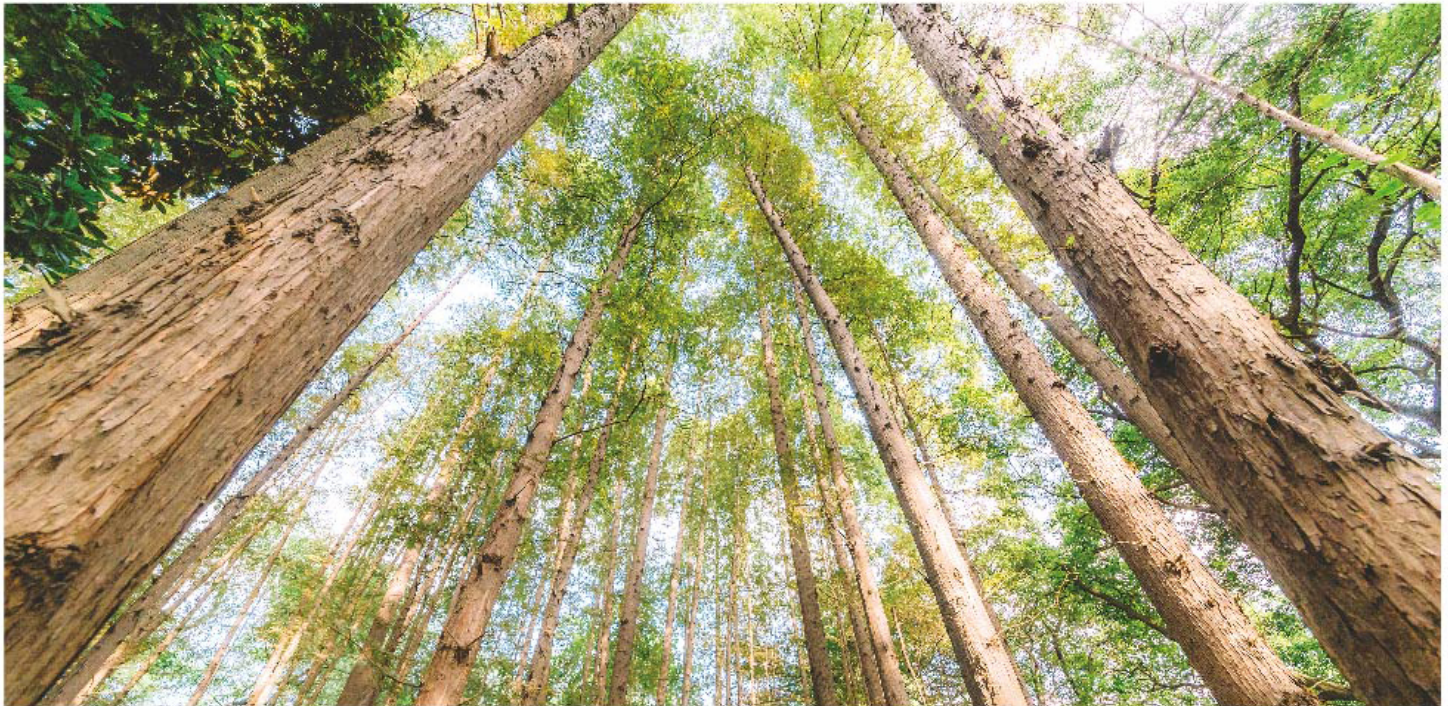

JC-683



JC-681



JC-682



### 产品规格 Product Specifications

Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	3.0 mm
Wear layer thickness 耐磨层	EN 429	0.5 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	15m


### CLASSIFICATION 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	> 10 <sup>9-10</sup>
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	EN 51 130	R9

### PERFORMANCES 性能

Abrasion group 耐磨等级	EN 649	T
Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	≤ 0.40%
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	Approx. 0.04mm 约等于0.04mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告

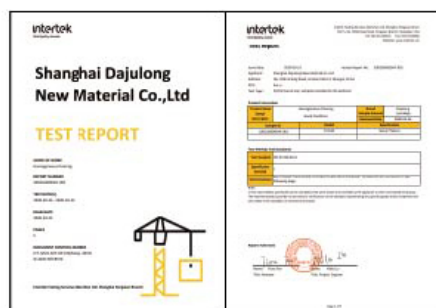

FloorScore环保检测报告



SGS防火检测报告

